



Characteristics

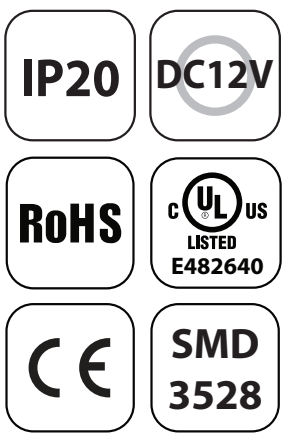

- **Most Preferred Best Seller LED Strip (CE, UL, RoHS Certified)**
- DC12V High luminous flux SMD3528
- High brightness 22-24lm/LED
- Double layer copper FPC
- 3-LED per each cuttable 1" section
- PCB Width 8mm

Physical

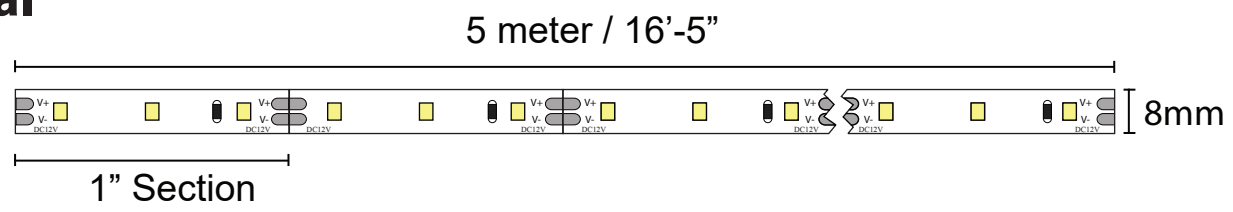

Parameters

Input Voltage	DC12V
LED Type	SMD 3528
Power Factor	9.6W/m ~ 2.92W/ft
Length	5m/roll ~ 16' 5"/roll
Cuttable Section	1"
Available in	6000K, Amber, Green
PCB Width	8mm
CRI	>= 80 / >=90
IP rated	IP20
Beam Angle	120 degree

