

**Characteristics**


<b>CLASS 2</b>	<b>Group A/B</b>
<b>Style 1015</b>	<b>200 FT</b>



Distributed by **Sunlux**

- **200Ft - 18AWG Indoor/Outdoor LED Wire**
- UV Resistant protection materials up to 300V / 105°C
- Plenum 18AWG LED Sign Wire w/ 2 tinned copper conductor w/jacket
- Min. Avg. Thick 15MLS
- Min. Any. Point 13MLS
- 1015 Style / Stranding 41
- Suitable for all applications
- UL and ROHS compliant

**Physical**

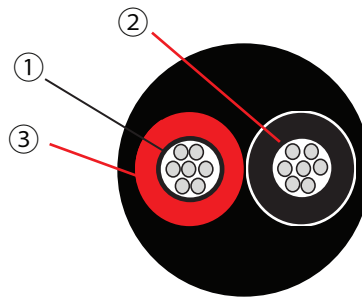

Style1015	Outside Diameter	Thickness	Tounge Range
	mm	mm	mm
① Conductor	0.16	-	0.158~0.162
② PVC Black	2.50	0.659	2.40~2.60
③ PVC Red	5.12	0.659	5.08~5.14