



Characteristics

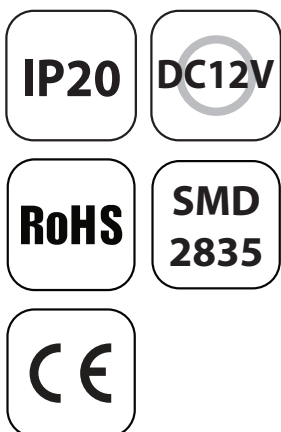

- **Most Preferred Best Seller LED Strip (CE, UL, RoHS Certified)**
- DC12V High luminous flux SMD2835
- High brightness 22-24lm/LED
- Double layer copper FPC
- 3-LED per each cuttable 1.43" section
- PCB Width 6mm

Physical

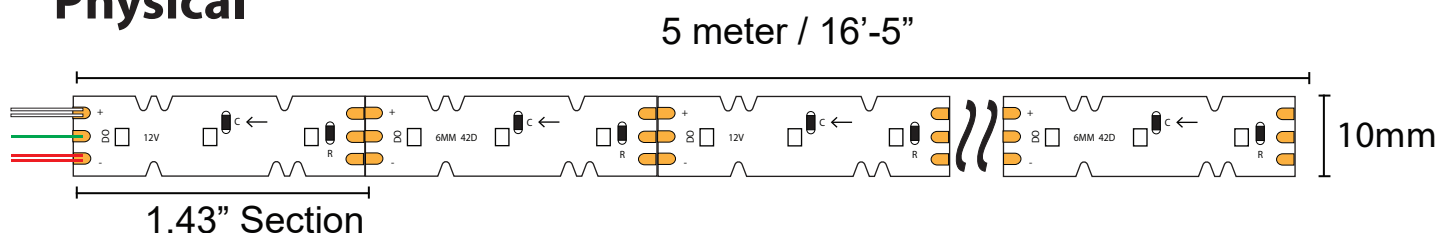

Parameters

Input Voltage	DC12V
LED Type	SMD 2835
Power Factor	15W/m ~ 4.57W/ft
Length	5m/roll ~ 16' 5"/roll
Cuttable Section	1.43"
Available in	RGB - IC (Integrated Circuit)
PCB Width	6mm
CRI	>= 80 / >=90
IP rated	IP20
Beam Angle	120 degree