



Characteristics

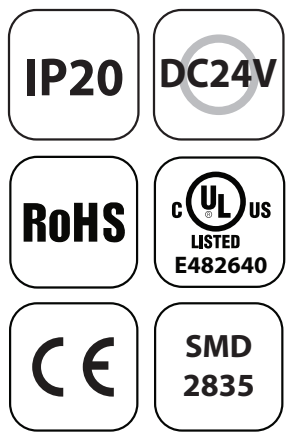

- **Most Preferred Best Seller LED Strip (CE, UL, RoHS Certified)**
- DC24V High luminous flux SMD2835
- High brightness 22-24lm/LED
- Double layer copper FPC
- 3-LED per each cuttable 2" section
- PCB Width 10mm

Physical

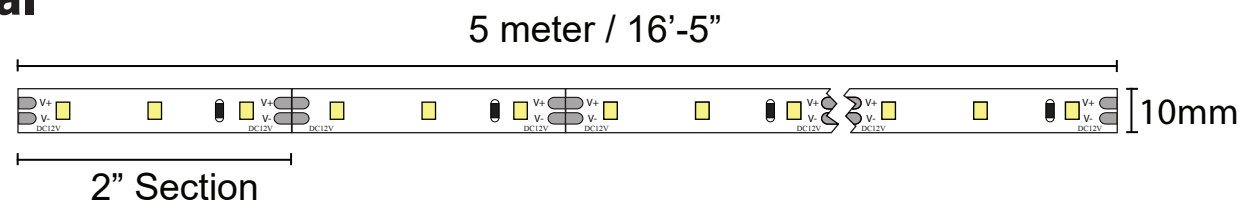

Parameters

Input Voltage	DC24V
LED Type	SMD 2835
Power Factor	14W/m ~ 4.26W/ft
Length	5m/roll ~ 16' 5"/roll
Cuttable Section	2"
Available in	6000K, 3000K, Red, Blue, Green, Amber
PCB Width	10mm
CRI	>= 80 / >=90
IP rated	IP20
Beam Angle	120 degree