



**Characteristics**

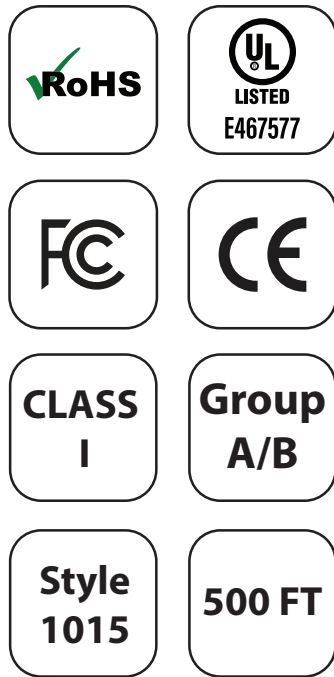

Distributed by **Sunlux**

- **500Ft - 18AWG Exterior LED Wire**
- UV Resistant protection materials up to 600V / 105°C
- Plenum 18AWG LED Sign Wire w/ 2 tinned copper conductor
- Min. Avg. Thick 30MLS
- Min. Any. Point 27MLS
- 1015 Style / Stranding 41
- Suitable for all applications
- UL and ROHS compliant

**Physical**



Style1015	Outside Diameter	Thickness	Tounge Range
	mm	mm	mm
① Conductor	0.16	-	0.158~0.162
② PVC Blue	2.50	0.659	2.40~2.60
③ PVC Red	5.00	0.659	4.80~5.20