



Characteristics

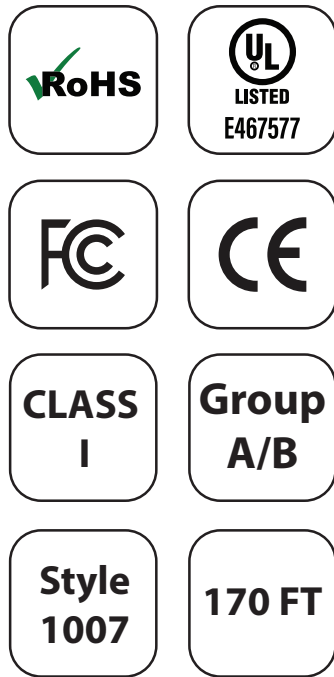

Distributed by Sunlux

- **170Ft - 20AWG Indoor LED Wire**
- PVC Protection materials up to 300V / 80°C
- Plenum 20AWG LED RGB Sign Wire w/ 4 tinned copper conductor
- Min. Avg. Thick 15MLS
- Min. Any. Point 13MLS
- 1007 Style / Stranding 21
- Suitable for all applications other than “Wet”
- UL and ROHS compliant

Physical

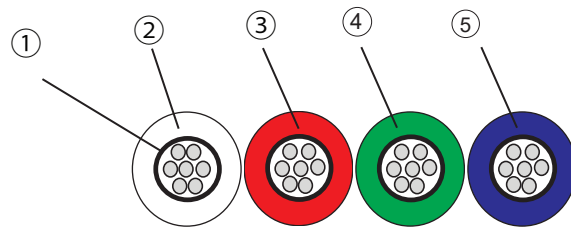

Style1007	Outside Diameter	Thickness	Tounge Range
	mm	mm	mm
① Conductor	0.18	-	0.178~0.182
② PVC White	0.18	-	0.178~0.182
③ PVC Red	0.18	-	0.178~0.182
④ PVC Green	0.18	-	0.178~0.182
⑤ PVC Blue	0.18	-	0.178~0.182